


EV-QUADRO-PRO


- 1** Separate diffuser from base plate by loosening retaining screws and removing diffuser.




- 3** Feed the mains power cable through the base plate in preparation for connection.




- 5** Terminate the cables into the terminal block ensuring the correct polarity is observed. Ensure all conductors are fully sleeved and insulated.




- 2** Separate LED PCB from base plate by removing retaining screws and lift/tilt PCB up.



- 4** Position and securely fix base plate to mounting surface using secure fixing methods. Fixing hole guides are provided on the base plate to be drilled to suit.




- 6** Secure the PCB to the base plate by pushing into place and replacing screws.



- 7** Reattach diffuser to base plate by positioning over screw holes and replacing screws.



i DIMENSIONS

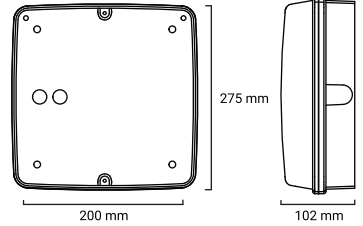

EV-QUADRO-PRO

PROGRAMMING & DEFAULT STANDALONE CONFIGURATION

L' (optional) Absolute input:
 L' active - LED on
 L' off - LED off

Standalone mode is automatically disabled after addressing either the ECD / ECG short address via DALI or setting the ECD operating mode to 0.

ORDERING INFORMATION

SKU	Product code	Product number	Description
14630	EV-QUADRO-PRO	9336462146309	Professional LED Weatherproof bunker
14631	EV-QUADRO-EM-PRO	9336462146316	Professional LED Weatherproof Emergency bunker
14632	EV-QUADRO-PRO-S	9336462146323	Professional LED Weatherproof bunker with sensor
14633	EV-QUADRO-EM-PRO-S	9336462146330	Professional LED Weatherproof Emergency bunker with sensor
17937	EV-QUADRO-PRO-LK	9336462179376	Lynk Professional LED Weatherproof bunker with wireless
17938	EV-QUADRO-EM-PRO-LK	9336462179383	Lynk Professional LED Weatherproof Emergency bunker with wireless
17939	EV-QUADRO-PRO-S-LK	9336462179390	Lynk Professional LED Weatherproof bunker with sensor with wireless
17940	EV-QUADRO-EM-PRO-S-LK	9336462179406	Lynk Professional LED Weatherproof Emergency bunker with sensor with wireless

TOTAL POWER CONSUMPTION (TPC)

Model	Maintained (Lamp on)	Non-maintained (Lamp off)
EV-QUADRO-PRO (14630)	25W	<0.5W

EV-QUADRO-PRO

SPECIFICATIONS**Professional Quadro bunker IP65**

Voltage 230V~
Frequency 50 Hz
Ambient temp. 0-40°C
Class 1

Rated duration 90 / 120 min
IP rating IP65
IK rating IK08
Mounting type Surface Mount

Wiring Terminal block
Control system DALI 2

**SAFETY WARNINGS**

1. This product must only be installed by a suitably qualified person.
2. Before commencing installation turn off and isolate the electrical supply.
3. Supply voltages within product. Isolate supply voltages before opening or servicing.
4. There are no user serviceable parts. Do not attempt to service other parts as this will void the warranty
5. As the installer, it is your responsibility to ensure you comply to all relevant building and safety codes. Refer to application standards for the relevant rules.
6. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
7. Supply voltages within isolate supply before opening.
8. Do not insulation test over 500vdc.
9. DALI is not SELV and as such should be treated as LV.

EV-QUADRO-PRO

WARRANTY STATEMENT

Ektor products are distributed in Australia and New Zealand by Evolt Pty Ltd (Evolt). The Australian Consumer Law as well as other Australian laws guarantee certain conditions, warranties and undertakings, and give you other legal rights, in relation to the quality and fitness for purpose of Ektor products sold in Australia. In Australia, our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure. What constitutes a major failure is set out in the Australian Consumer Law. Nothing in this Warranty purports to modify or exclude the conditions, warranties and undertakings, and other legal rights, under the Australian Competition and Consumer Act and other Australian laws. Ektor products are warranted in Australia for a period of 3 years from the date of delivery of the product, provided that the products are properly stored, installed, used and maintained in accordance with the instructions contained within their manual. Products that have been altered in any way or used other than in accordance with their instructions are not covered by this warranty.

This warranty is not transferable and is valid only in the hands of the purchaser of the product. The warranty does not cover Ektor products other than those purchased from Evolt. Proof of purchase must be provided to Evolt with any warranty claim. Evolt recommends that the purchaser attaches their proof of purchase to their product manual. Evolt's total liability under this warranty is limited to the cost of repair or replacement of the faulty product. Evolt may satisfy its obligations under this warranty in full by repair or replacement of a faulty product. This warranty does not apply to consumable items such as lamps or batteries or other items that can be classified as consumable. For the avoidance of any doubt, any and all warranties or conditions which are not guaranteed under the Australian Competition and Consumer Act or the Australian Competition and Consumer Regulations 2010 and which are not expressly included in this Warranty as additional warranties or conditions are excluded. This Warranty does not cover loss or damage caused by wear and tear, misuse, incorrect installation or operation, failure to clean and maintain, incorrect voltage or non-authorized electrical connections, adverse external conditions (such as power surges and dips, acts of God, exposure to heat, corrosion, insect or vermin infestation), use of non-authorized or defective parts or globes, or to items that have been repaired other than by Evolt or a repairer approved by Evolt.

TECHNICAL SUPPORT AND TROUBLESHOOTING

For further assistance in using this product, consult your nearest wholesaler or Evolt Pty Limited