

BOXIT WALL BASIC



CORE



FEATURES

- **24M** - 340 x 150 mm decal size
- Fully compliant (**AS/NZS 2293**)
- Replaceable easy fit, quick release decals
- Works as Single Point Units (**SPU**) out of the box
- High Quality Lithium batteries (**LiFePO₄**) and smart charger



C0: E2, C90: E2, C180: C2

Emergency classification (2hr)



MOUNTING OPTIONS

Wall mount or suspended with a rod mount kit




SINGLE POINT UNIT

Ektor products work as SPUs out of the box



ECO FRIENDLY

Using a High Quality Lithium battery (LiFePO₄)

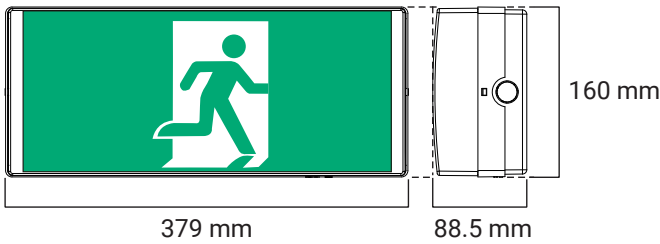

PRODUCT RANGE

ORDER CODE	PRODUCT NUMBER	SKU	QTY
EV-BOXIT-WALL-24M Basic Wall Mounted Emergency Exit	9336462150016	15001	4

GENERAL FEATURES

- Single-sided decal
- Fully compliant (AS/NZS 2293)
- Replaceable easy fit, quick release decals

BUILT TO LAST

- LED light source
- Long life electronics
- Low power consumption
- 5 Years Design Life – 44,000 hours at max. ambient
- High Quality Lithium battery (LiFePO₄) and smart charger

SUITABLE INSTALLATION TYPES (OUT OF THE BOX)

- Standalone (SPU)

ACCESSORY RANGE

ORDER CODE	DESCRIPTION
EV-BOXIT-DP	Boxit Decal pack for Wall and Ceiling (1 x left, 1 x right, 1 x straight)
EV-BOXIT-GT	Boxit LED Gear tray (decal pack included)
EV-BOXIT-DIFF-WALL	Boxit Wall diffuser (decal pack included)
EV-1500MAH-3.2V-LIFEPO4	1500mAh 3.2V 2 Cell LiFePO ₄ Battery
EV-RODMOUNT-WHT	Rod mount, incl. Bracket for roof /body

OPERATIONAL INFORMATION

GENERAL

Voltage	240V~ 50Hz
Ambient temp.	0 to 40°C
Class	2
IP rating	IP20
Wiring	Terminal block (1-16 mm ϕ)
Mounting type	Surface / suspended (Rod Mount Kit available)
Lamp power	0.95 W

EMERGENCY

Emergency lamp power	0.95 W
Rated duration	90 / 120 min
Classification	C0:E2, C90: E2, C180: C2 (2hr)

BATTERY

BATTERY		CHARGE	
Type	LiFePO ₄	Type	Smart charge
Voltage	3.2 V	Time	16 Hours
Codes	01307	Operation	Variable

CONSTRUCTION

Viewing distance	24M	Decal size	340 x 150 mm
Body	PC	Diffuser	PC
Weight	1kg net / 8.24 gross	Gear tray	PC

COMPLIANCE

Standards	AS/NZS 60598.2.22 AS/NZS 2293.3 IEC 60598-2-22 CISPR 15
-----------	--

NOTE: For more information on the chemical resistance of our polycarbonate or our compliance documentation, please see our website.

TOTAL POWER CONSUMPTION (TPC)

MAX.	AVG.
3.60 W	3.33 W

NOTE: Average power consumption calculated with the assumption of four emergency events per year and that the battery charger is in standby at all other times (above typical usage).