

RAZOR 16M



LYNK



BLACK MODEL
AVAILABLE

FEATURES

- **16M** - 200 x 100 mm decal size
- Single and double sided decals
- Fully compliant (**AS/NZS 2293**)
- Rod / surface / suspended or wall mounted
- Works as Single Point Units (**SPU**) out of the box
- High Quality Lithium batteries (**LiFePO₄**) and smart charger
- **Wireless mesh** built on IEC62386-104 over Thread



WIRELESS MESH

Automatically test and sync data to the Cloud



C0:D20, C90:C25

Emergency classification




COMPLIANT

To Australian and international safety & performance standards



SELF TEST

Commission the product to perform its own tests

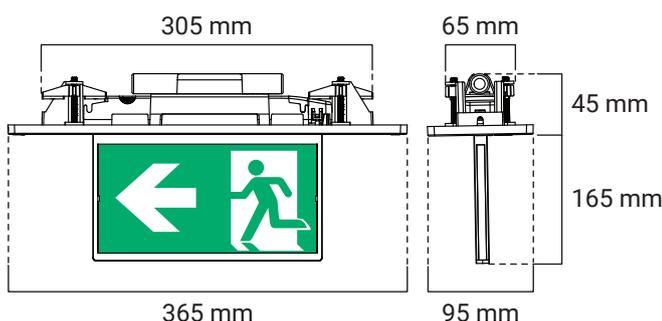

PRODUCT RANGE LYNK

ORDER CODE	PRODUCT NUMBER	SKU	QTY
EV-RAZOR-16M-PRO-LK Lynk Razor Professional Recessed Emergency Slimblade Exit, 16M - w/wireless	9336462180662	18066	4
EV-RAZOR-16M-PRO-B-LK Lynk Razor Professional Recessed Emergency Slimblade Exit, 16M, Black - w/wireless	9336462180679	18067	4

GENERAL FEATURES

- **Wireless** meshing system
- Single and double sided decals
- Soft-start charger to reduce building load
- Available in low illumination area black model
- Fast emergency switch-over (<0.5s) for high-task areas

BUILT TO LAST

- Long life electronics
- 10 Years Design Life – 100,000 hours at max. ambient
- High Quality Lithium battery (LiFePO₄) and smart charger

SUITABLE INSTALLATION TYPES (OUT OF THE BOX)

- IEC62386 over IEC62386-104
- Wireless monitoring
- Self test (AS2293/ IEC62034)

ACCESSORY RANGE

ORDER CODE	DESCRIPTION
EV-RAZOR-16M-RM-DECAL	Razor Decal Pack 1xright, 1xleft and 1xstraight
EV-RAZOR-LED-FIRE-SM-KIT	Surface Mount Kit
EV-RAZOR-LED-FIRE-SM-KIT-B	Surface Mount Kit, black
EV-RODMOUNT-WHT	Rod mount, incl. bracket for roof /body
EV-RODMOUNT-BLACK	Rod mount, incl. bracket for roof /body, black
EV-1500MAH-6.4V-LIFEPO4	1500MAH 6.4V 2 Cell LiFePO ₄ Battery
EV-WIREDBYCLICK-2.4M-F&P	Wire By Click 5-Pin Lead L1025/5, 2.4M
EV-WIELAND-2.4M-F&P	Wieland Plug GST1815S B1 ZR1 S PB02, 2.4M
EV-CMS-2.4M-5PIN	CMS 5 Pin Plug Set, 2.4M
EV-WAGO-2.4M-F&P	WAGO Plug 5-P Blue 51110475, 2.4M
EV-CMS-2.4M-6PIN	CMS 6 Pin Plug Set, 2.4M

OPERATIONAL INFORMATION

GENERAL	
Voltage	240V~ 50Hz
Ambient temp.	0 to 40°C
Class	2
IP rating	IP20
Wiring	Terminal block (1-16 mm \square)
Mounting type	Recessed (rod / surface / suspended accessories)
Wireless	IEC62386-104 over Thread
Lamp power	0.55W

EMERGENCY	
Emergency lamp power	0.75W
Rated duration	90 / 120 min (1 / 3 / 4 / 8 hours, selectable)
Classification	C0:C40, C90:C32 (2hr) (white model only)

BATTERY		CHARGE	
Type	LiFePO ₄	Type	Smart charge
Voltage	6.4 V	Time	16 Hours
Codes	01302	Operation	Multi-state

CONSTRUCTION			
Viewing distance	16M	Decal size	200 × 100 mm
Cut-out	305 x 65 mm	Diffuser	Acrylic
Body	PC	Gear tray	PC

Weight	0.85 kg net / 5.6 gross		
--------	-------------------------	--	--

COMPLIANCE			
Standards	AS/NZS 60598.2.22	IEC 62386-104	
	AS/NZS 60598.2.2 (IC-4 rated)	IEC 62386-102	
	AS/NZS 2293.3	IEC 62386-202	
	IEC 60598-2-22	IEC 62034	
		CISPR 15	

NOTE: For more information on the chemical resistance of our polycarbonate or our compliance documentation, please see our website.

TOTAL POWER CONSUMPTION (TPC)

MAINTAINED MODE		
	MAX.	AVG.
	3.55 W	1.75 W

NOTE: Average power consumption calculated with the assumption of four emergency events per year and that the battery charger is in standby at all other times (above typical usage).

ektor.com.au
E: sales@evolt.com.au
P: 1300 4EVOLT (438 658)

evolt
the electrical evolution

Ektor is dedicated to continuous product improvement. Datasheet is subject to change without notice, E&OE. Images are for illustrative purposes only.